




<http://suncoreus.com>



### LED T8 Tube Light design

## LED T8 Tube

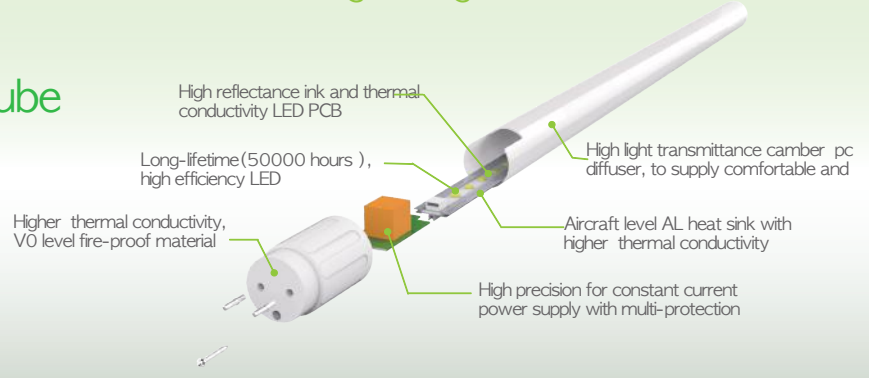

### Applications :

Factories, shopping malls, residence, offices, hotels, cafe, retail-stores, banquet halls, museums, exhibition halls, etc.



Email: [sales@suncoreus.com](mailto:sales@suncoreus.com)  
 Add : 3825 Academy Pkwy South NE, Albuquerque, New Mexico 87111, U.S.A.  
 T: (575)812-8080 F: (575)812-8081






http://suncoreus.com

## Features



- Efficient heat dissipation - aircraft grade aluminum is embedded inside, guaranteeing excellent thermal handling.
- seamless and easy installation, being comparable with most all major electronic ballasts.



## LED T8 Tube Nature II Series

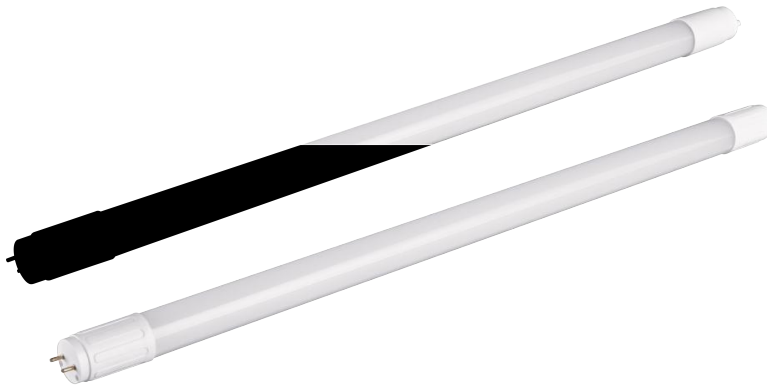

or



Unit: mm

Type	Model No.	Voltage (V)	Power (W)	Power Factor	Dimmable	Luminous Flux (lm)	Beam Angle	CRI	CCT (K)	Life Time	IP Level
T8-0.6m	T901P2-K06	90-277V	10	>0.9	Non-Dim	900	180°	≥80	4000K/5000K	50000H	IP20
T8-1.2m	T162P4-K06	90-277V	16	>0.9	Non-Dim	1600	180°	≥80	4000K/5000K	50000H	IP20
T8-1.2m	T182P4-K06	90-277V	18	>0.9	Non-Dim	1800	180°	≥80	4000K/5000K	50000H	IP20
T8-1.2m	T222P4-K06	90-277V	22	>0.9	Non-Dim	2200	180°	≥80	4000K/5000K	50000H	IP20
T8-0.6m	T901P2-H05	200-240V	9	>0.9	Non-Dim	900	180°	≥80	3000K-6500K	25000H	IP20
T8-1.2m	T182P4-H05	200-240V	18	>0.9	Non-Dim	1800	180°	≥80	3000K-6500K	25000H	IP20
T8-1.5m	T222P6-H05	200-240V	22	>0.9	Non-Dim	2200	180°	≥80	3000K-6500K	25000H	IP20